



## Compact (Two-, Three-, or Four-digit) S2-series Added to Static Mother Board Models

- Easily connect a M7E Digital Display without soldering.
- Two-, three- and four-digit Mother Boards are available for connecting M7E Digital Displays and, by using two Mother Boards, two- to eight-digit displays are possible.
- The depth of the Mother Board with M7E Digital Display Units is only 58 mm, ideal for mounting to compact or thin control panels.
- Connecting to OMRON's PLCs via dedicated PLC cables (sold separately) (refer to *M7E Options*).

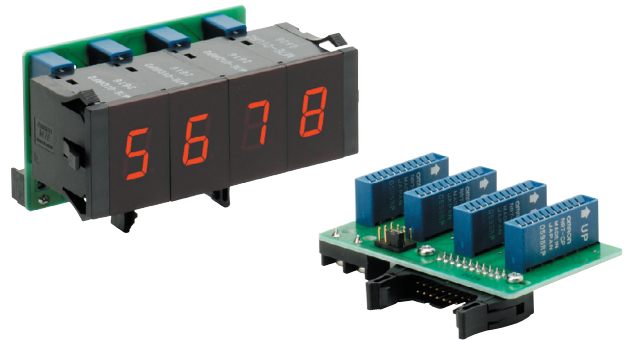

## Model Configuration

### ■ Configuration (Example of 6-digit Display)

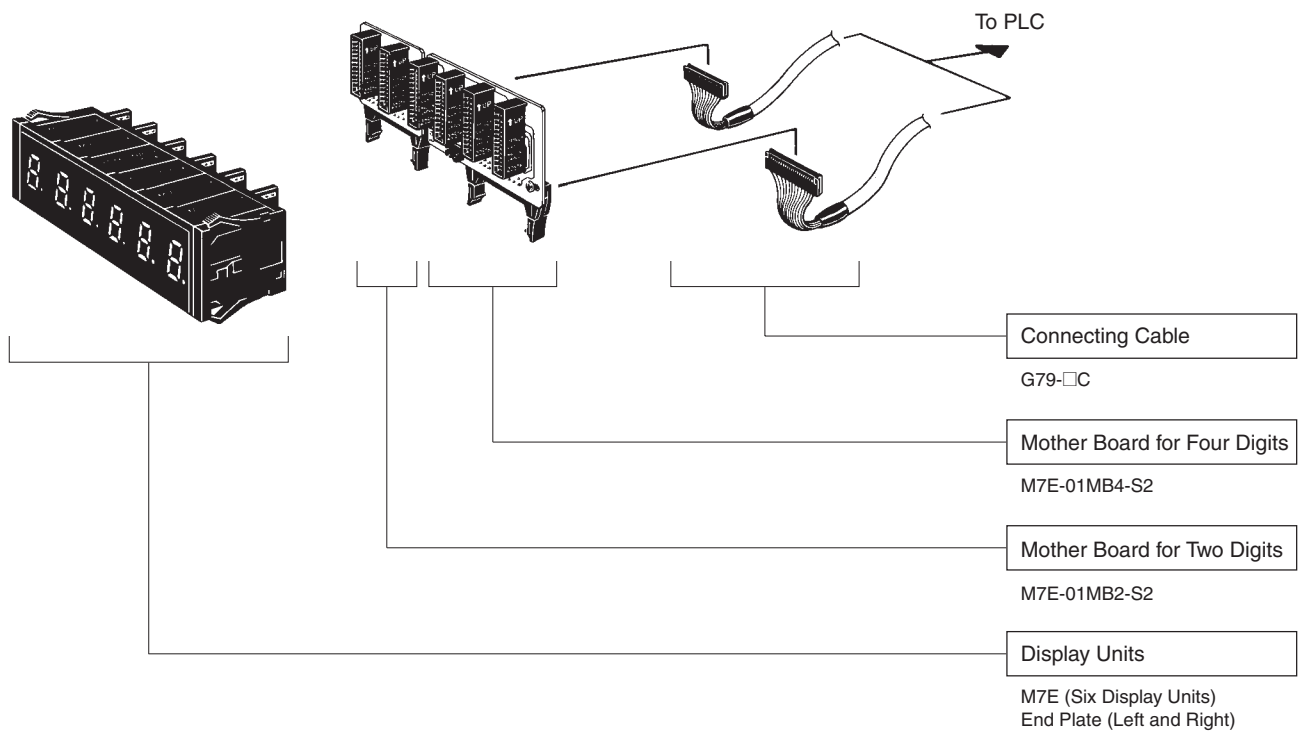

## Ordering Information


### List of Models

Type	Number of digits	Model
Static	4	M7E-01MB4-S2
Static	3	M7E-01MB3-S2
Static	2	M7E-01MB2-S2
Dynamic (See note.)	4	M7E-01MB4-D

**Note:** Cannot be used with the M7E-01D□D2 (Models with Zero Suppression).

## Nomenclature

### Mother Board Model for Display Units with 14 mm-high Characters

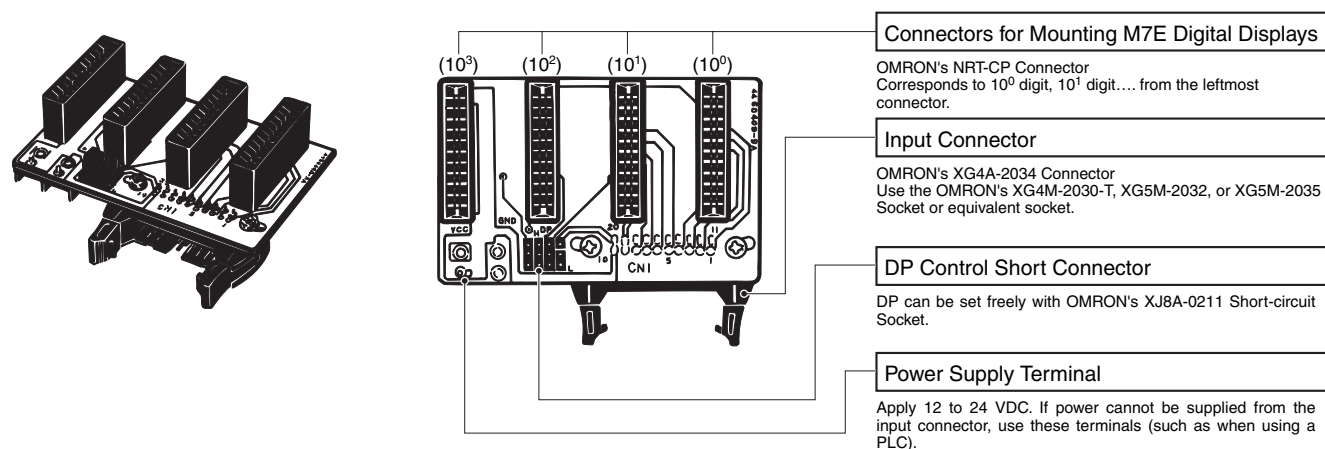



## Installation

### Input Connector (CN1) Pin Arrangement

The following illustration shows the pin arrangement of the XG4A-2034/-2031 Input Connector. Be sure to check the terminal numbers before preparing the socket.


M7E-01MB4-S2  
M7E-01MB3-S2  
M7E-01MB2-S2  
(Connector: XG4A-2034)

M7E-01MB4-D  
(Connector: XG4A-2031)



### Inserting Connectors

When inserting the M7E Mother Board, make sure that the UP arrow is pointing upwards.




### Five- to Eight-digit Display

When using M7E Mother Boards in combination for five- to eight-digit displays, locate the M7E-01MB2-S2 Mother Board (for two-digit display) on the left of the other M7E Mother Board. (The M7E Units cannot be mounted side by side if the 2-digit Mother Board is used for the rightmost digits.) In this case, zero suppression can be performed by connecting the RBO of the Mother Board for the leftmost digit and the RBI of the Mother Board for the rightmost digit.

# Circuit Diagrams

## M7E-01MB4-S2

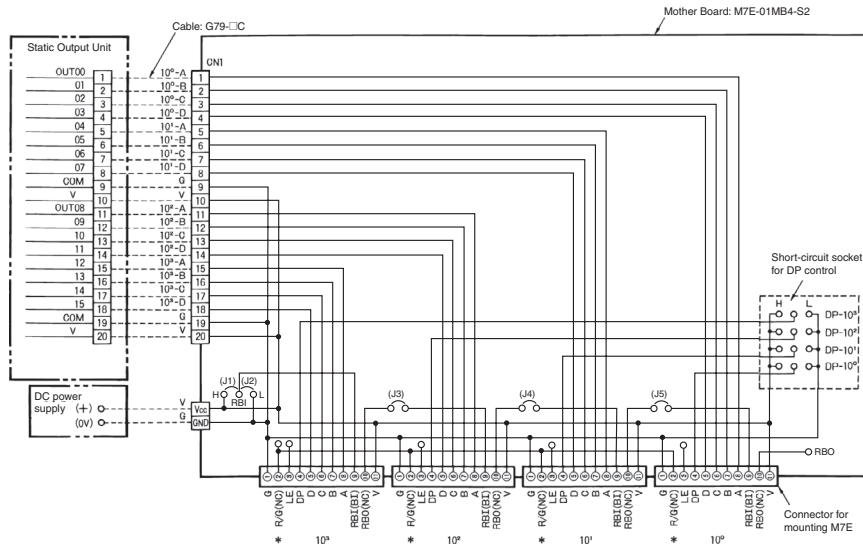

\* The M7E-01□□N2 (negative logic) is used with the following:


PLC Unit: C200H-OD215 with static outputs

Cable: G79-□C

**Note:** Connect the following jumpers when using zero suppression.

Type	Jumper
Positive logic	J1, J3, J4, J5
Negative logic	J2, J3, J4, J5

## M7E-01MB3-S2

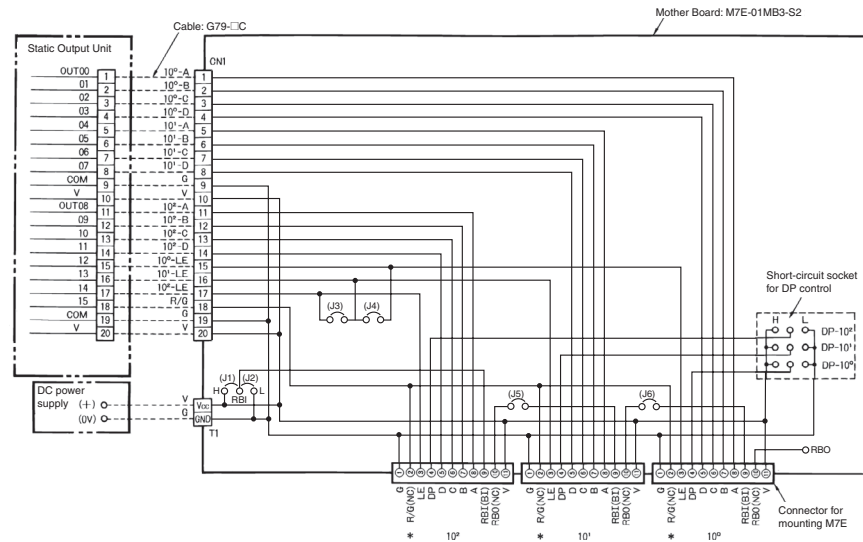

\* The M7E-01□□N2 (negative logic) is used with the following:


PLC Unit: C200H-OD215 with static outputs

Cable: G79-□C

**Note:** Connect the following jumpers when using zero suppression.

Type	Jumper
Positive logic	J1, J5, J6
Negative logic	J2, J5, J6

## M7E-01MB2-S2

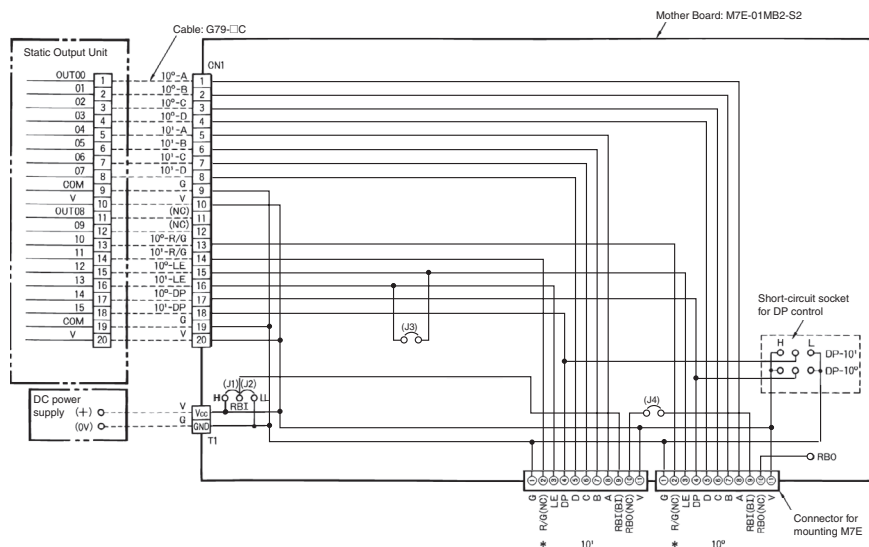

\* The M7E-01□□N2 (negative logic) is used with the following:


PLC Unit: C200H-OD215 with static outputs

Cable: G79-□C

**Note:** Connect the following jumpers when using zero suppression.

Type	Jumper
Positive logic	J1, J4
Negative logic	J2, J4

## M7E-01MB4-D (The M7E-01D□D2 (zero suppression) cannot be used.)

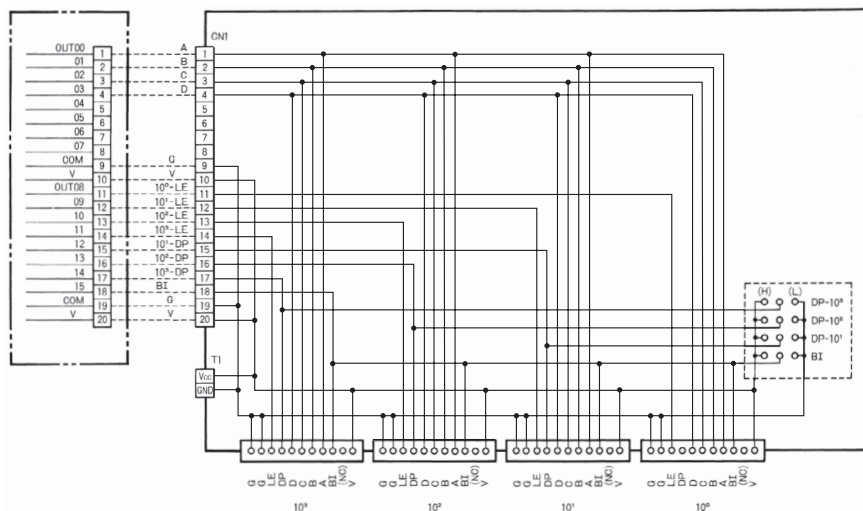

\* With connection, e.g., to a microcomputer control circuit.

Use a PLC with static output if a PLC is to be connected.

- Note:**
1. The M7E-01DRGN2 (red/green two-color models) cannot be used with the M7E-01MB4-D Mother Board. The display will remain green and the color cannot be selected.
  2. Short-circuit Sockets for DP control are not mounted.

## DP/BI Control


- By using the XJ8A-0211 Short-circuit Socket, the decimal point can be lit between any adjacent digits specified by the user.
- Short-circuit connectors (XJ8D-1211) and short-circuit sockets (XJ8A-0211) are not mounted on the M7E-01MB4-D.

Terminal	Symbol	M7E		
		Positive logic	Dynamic output	Negative logic
(See note 1.) DP-10 <sup>0</sup> 10 <sup>1</sup> 10 <sup>2</sup> 10 <sup>3</sup>	H	Lit	Off	Off
	L	Off	Lit	Lit
	Open	Off	Off	Off
	Open	Off	Off	Off
(See note 2.) BI	H	All OFF	All lit	All lit
	L	All lit	All OFF	All OFF
	Open	All lit	All lit	All lit

**Note:** 1. The DP terminal is used to turn ON the decimal point for each digit.

2. The BI terminal is used to light or turn OFF all digits.

Example: When lighting the decimal point on the 10<sup>1</sup> digit  
Mother Board: M7E-01MB4-S2 static, 4-digit model  
M7E: M7E-01D□P2 positive logic standard model


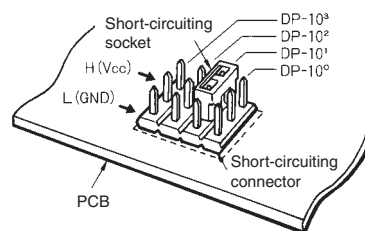


- Either the short-circuit connector or PLC can be connected when controlling DP/BI terminals on the M7E-01MB4-D Mother Board (dynamic model) or controlling the DP terminal on the M7E-01MB2-S2 (two-digit static model). Do not connect both the short-circuit connector and PLC to the Mother Board.
- The BI terminal can be used for control only on the M7E-01MB4-D.



# Dimensions

Note: All units are in millimeters unless otherwise indicated.



## M7E-01MB4-S2

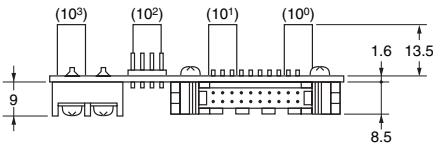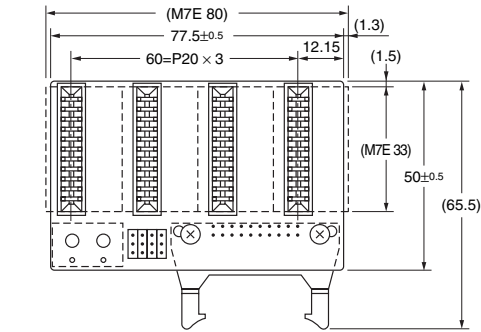

## M7E-01MB3-S2


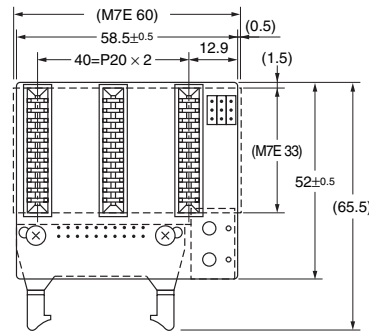


## M7E-01MB2-S2

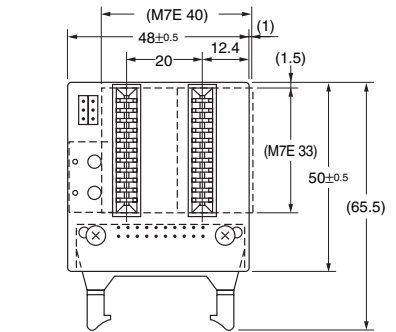

- Note: 1. Dotted lines indicate the mounting dimensions of the M7E.  
 2. Tolerance is  $\pm 0.4$  mm unless otherwise specified.

## M7E-01MB4-D

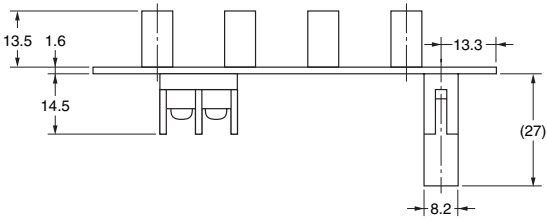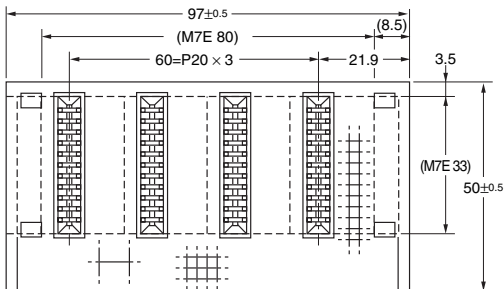

- Note: 1. Dotted lines indicate the mounting dimensions of the M7E.  
 2. Tolerance is  $\pm 0.4$  mm unless otherwise specified.  
 3. Short-circuit Sockets for DP control are not mounted.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.  
 To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2008.12

In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**  
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2008 All Right Reserved.